


Connecting a PAC 2200 Door Controller to a Dataswitch using 25 pin modems

October 2000

TB36 Ver 1.0

This technical bulletin gives details on how to connect a PAC 2200 Door Controller, to a COS Dataswitch via two Black Box Short Haul Modems (p/n ME721A/M/R3).

See the diagram below, for a representation of this connection.

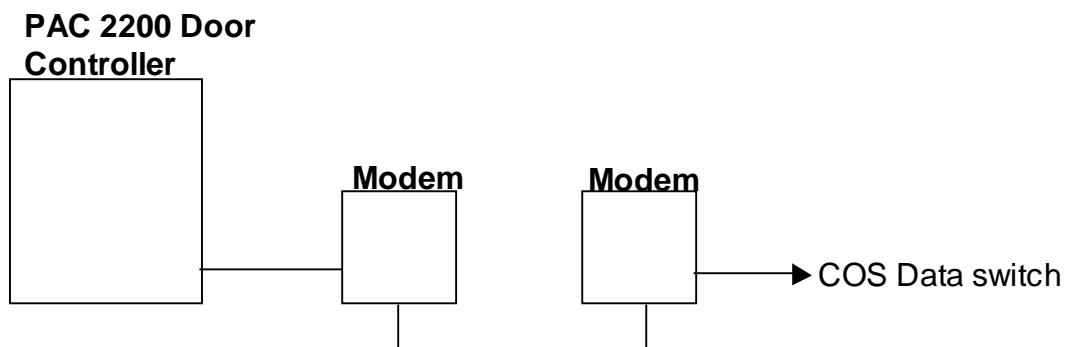

Wiring Details

Door Controller to Modem

Door Controller	25 Pin Connector
RX	2
TX	3
CTS	5
GND	7
DTR	20

Modem To Modem

Unit 1	Unit 2
RCV-	XMT-
RCV+	XMT+
XMT+	RCV+

PAC International Limited. 1 Park Gate Close, Bredbury, Stockport, SK6 2SZ, England
Tel: +44 (0) 161 406 3400. Fax: +44 (0) 161 430 8658
www.pac.co.uk

Error! Reference source not found. Ver Error! Reference source not found. Error! Reference source not found.

XMT-

RCV-

Note: Set both modems to DCE mode.