




AMG2111 Instruction Sheet

AMG2111 Rackmount Single Channel Video Only Fibre Optic Receiver

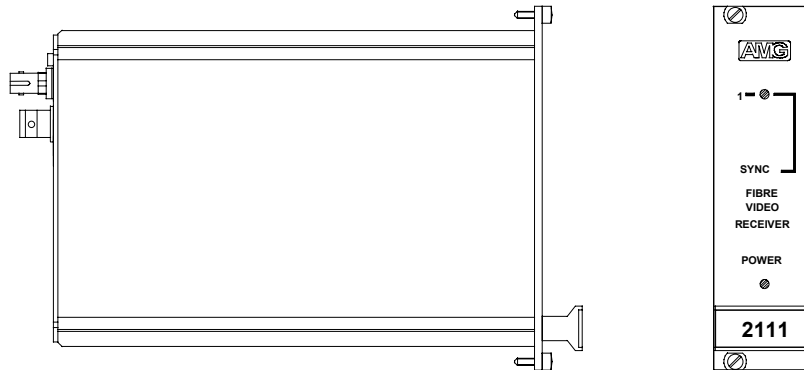

Video Connection

Connectors 75 ohm BNC Socket.
 Output Impedance 75 ohm terminated.
 Output Level..... 1 volt p-p nominal.
 Frequency Response..... 10Hz to 10MHz min.

Optical Connection

Connectors..... ST Style
 Receiver Sensitivity
 Gain Up to -30dBm nominal.
 No Customer adjustments are available within the unit.
 Wavelength..... 850nm nominal.

Dimensions

Height 3U
 Width 7HP
 Depth 205mm

Mounting Details

The AMG2111 plugs into and is powered from the AMG2000 Subrack

Indicators

Power..... Green – lit when unit powered
 Video Sync Green – lit when video signal present on optical input.